


气动高平台法兰球阀

Pneumatic High Platform Flanged Ball Valves

Q641F-16P/R

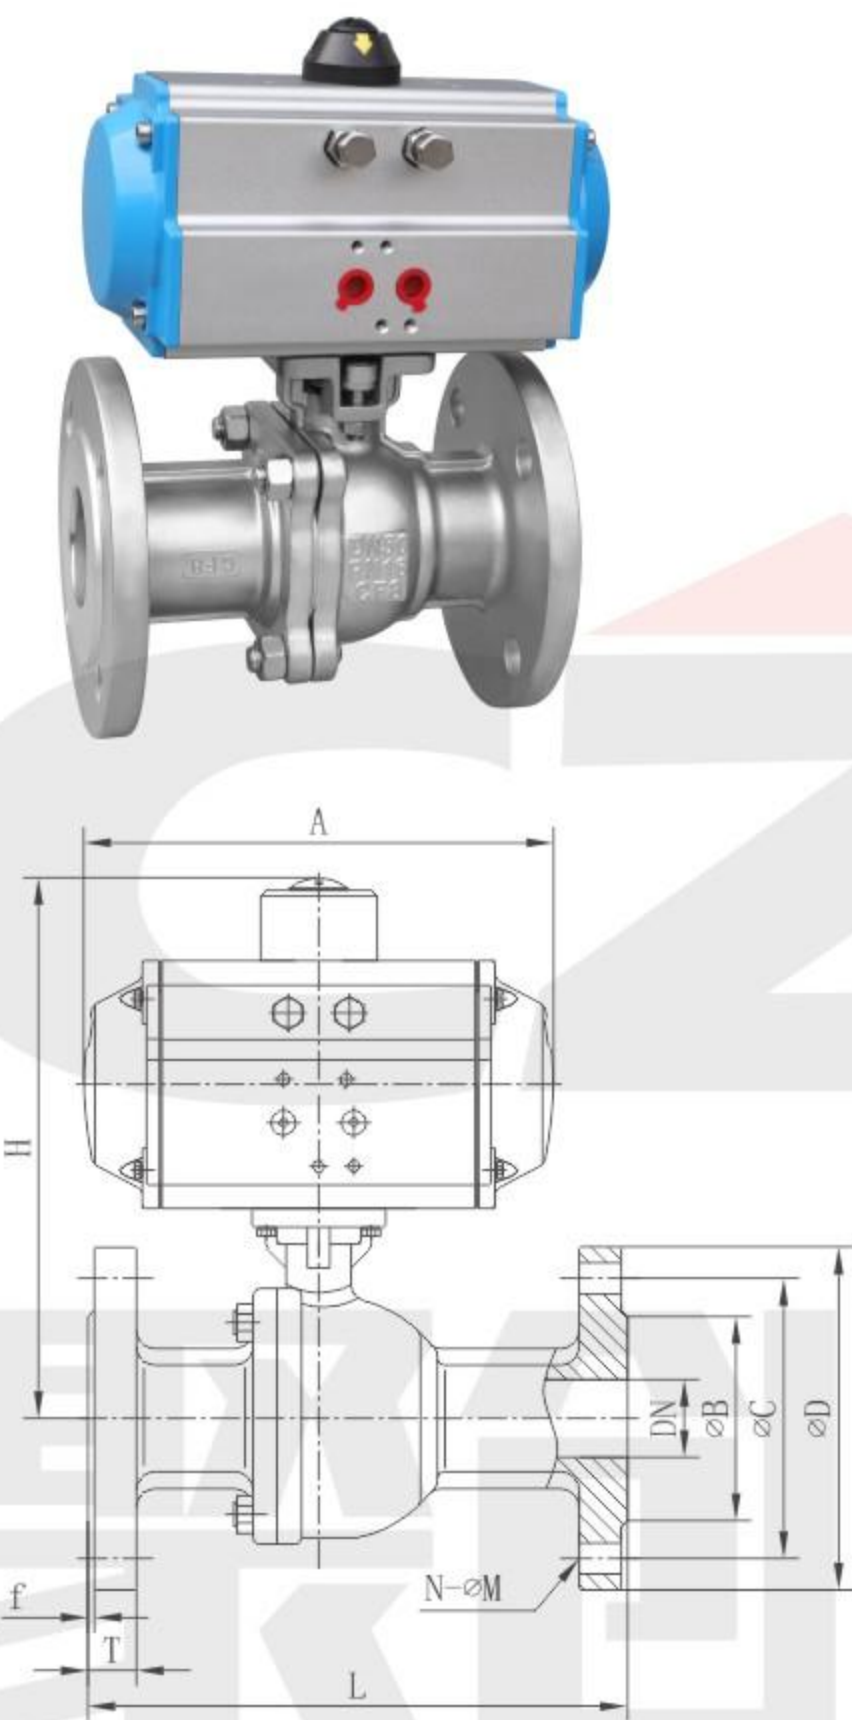

Q641F-16P/R
气动高平台法兰球阀

技术参数


介质温度: -20℃ ~ +180℃
环境温度: -20℃ ~ +60℃
公称压力: 0~1.6MPa
控制气体: 中性气体, 空气
气源压力: 0.3~0.8MPa
规格: DN15-DN200
阀体材质: CF8 CF8M
阀座材质: PTFE
阀杆材质: 304
密封圈材质: NBR

Technical parameters

Medium temperature: - 20 °C ~ + 180 °C
Ambient temperature: - 20 °C ~ + 60 °C
Nominal pressure: 0 ~ 1.6 MPa
Control gas, gas, air
Air pressure: 0.3 ~ 0.8 MPa
Specification: DN15 - DN200
The valve body material: CF8 CF8M
seat material: PTFE
Stem material: 304
Sealing ring material: NBR

型号 model	L	T	f	D	C	B	A	H	N-M	执行器 Actuator
DN15	130	14	2	95	65	45	163	164	4-Φ14	AT63
DN20	140	15	2	105	75	54	163	170	4-Φ14	AT63
DN25	150	16	2	115	85	65	163	175	4-Φ14	AT63
DN32	165	16	2	135	100	78	163	184	4-Φ18	AT63
DN40	180	17	2	145	110	85	214	214	4-Φ18	AT75
DN50	200	18	2	160	125	100	252	225	4-Φ18	AT88
DN65	220	18	2	180	145	120	252	253	4-Φ18	AT88
DN80	250	18	2	195	160	135	315	296	8-Φ18	AT115
DN100	280	20	2	215	180	155	354	322	8-Φ18	AT125
DN125	320	22	3	245	210	185	418	408	8-Φ18	AT145
DN150	360	24	3	280	240	210	450	465	8-Φ22	AT160
DN200	400	26	3	335	295	265	530	552	12-Φ22	AT210

气动薄型球阀 Pneumatic Thin Ball Valve

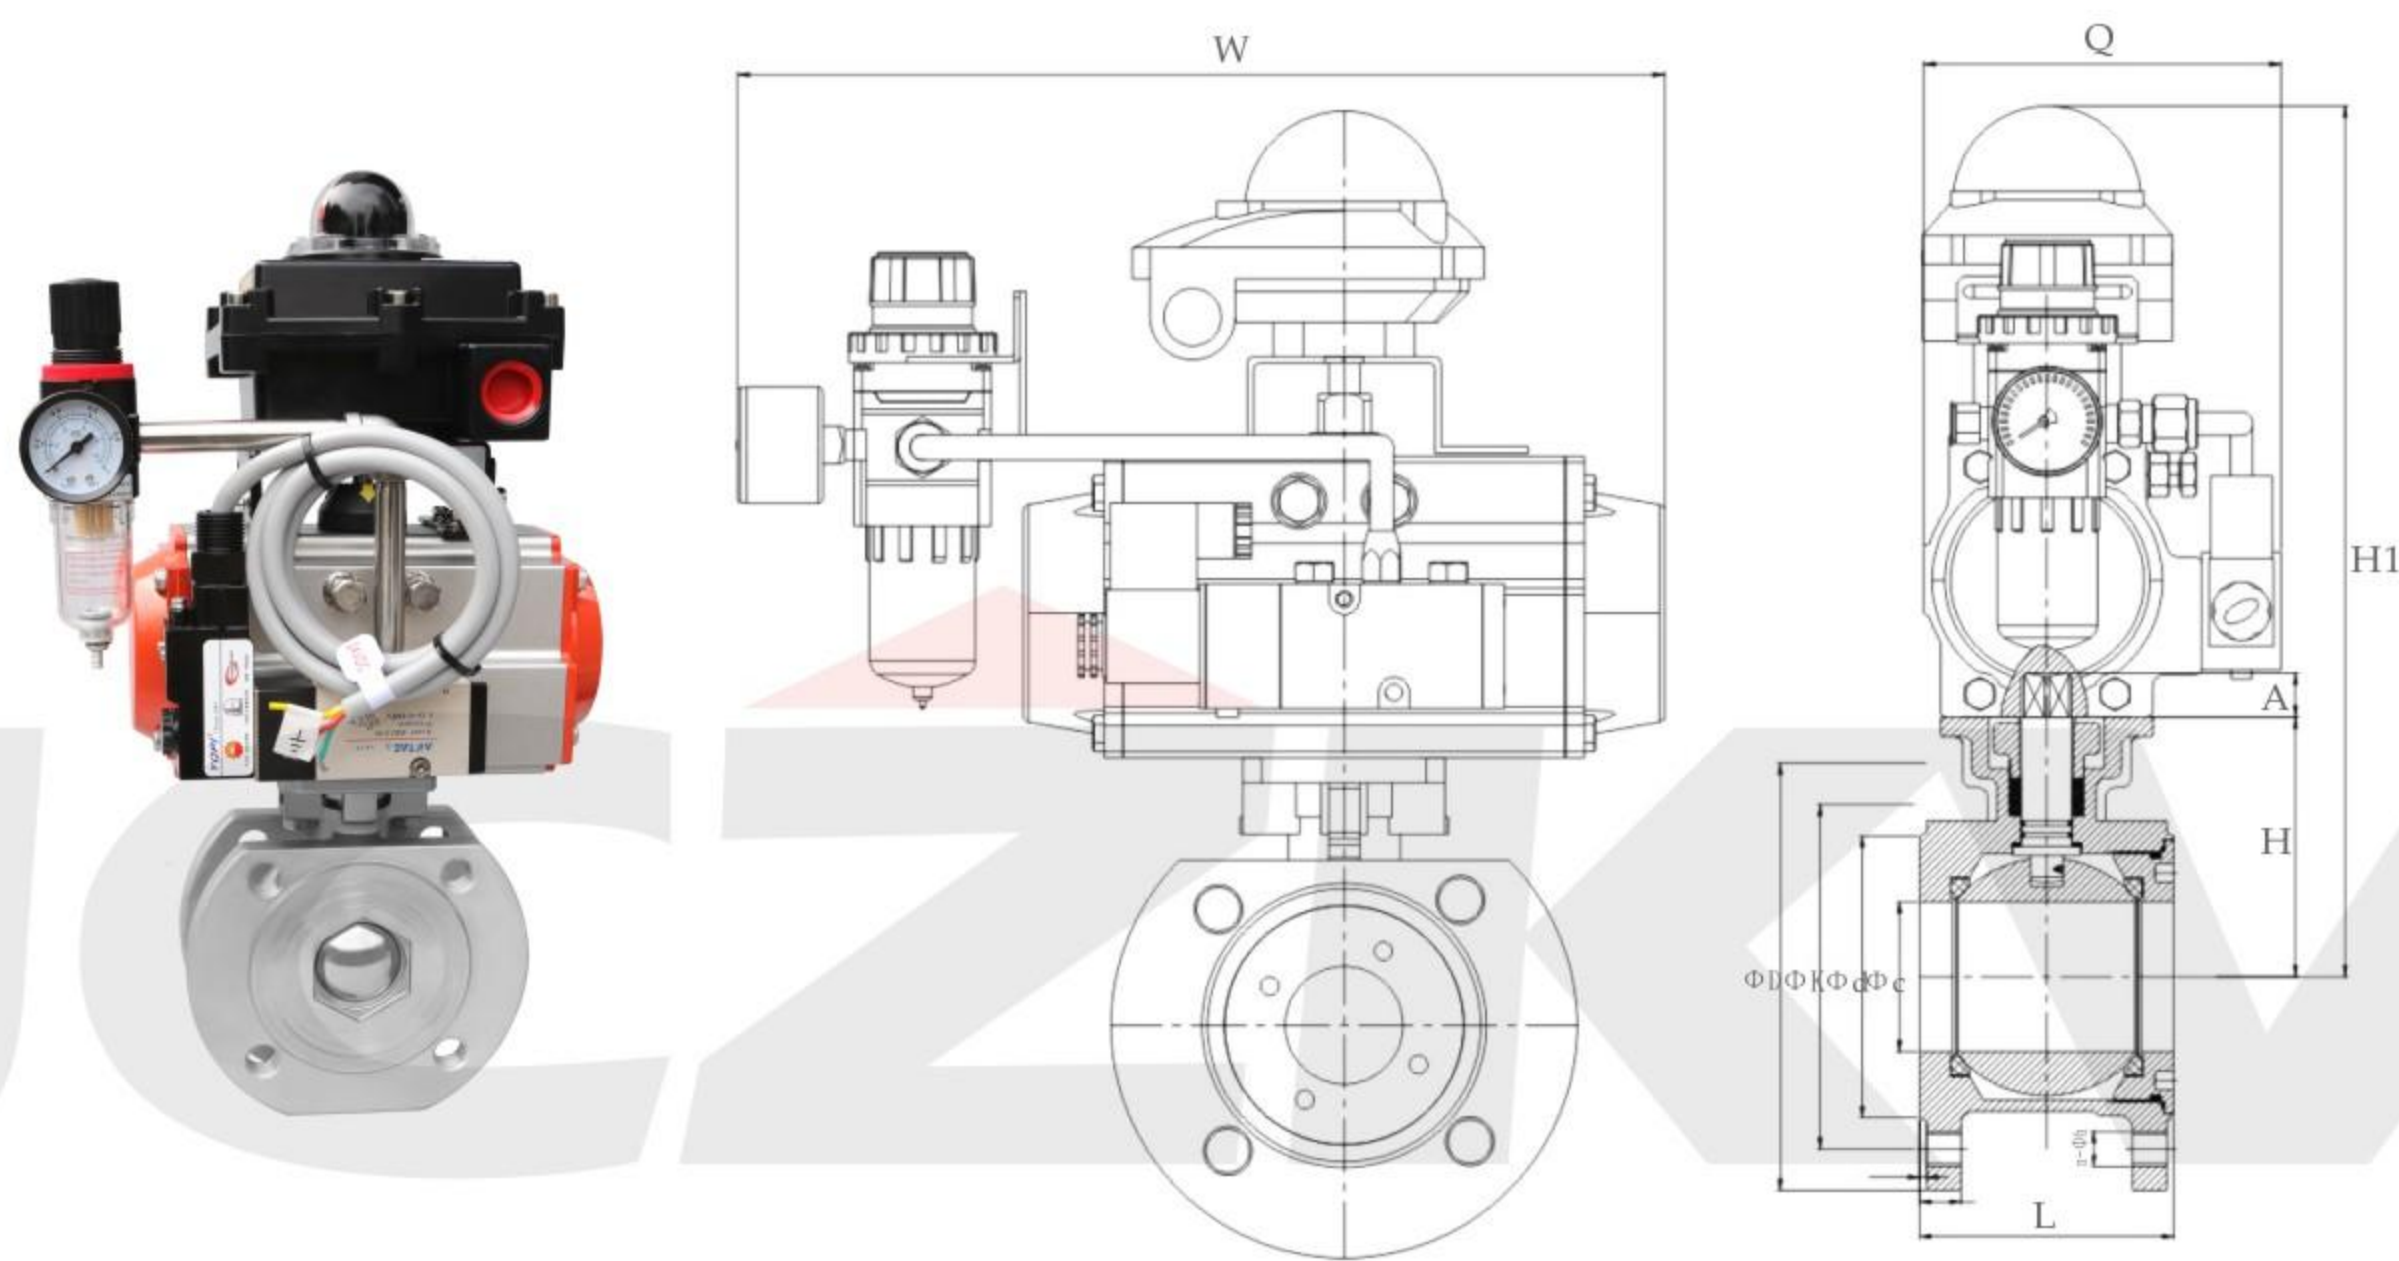


DN	PN	C	D	K	d	L	n-Φd	T	f	H	A	H1	W	Q
DN15	16-40	15	95	65	45	44	4-M12	14	2	62	9	287	248	100
DN20	16-40	20	105	75	58	44	4-M12	16	2	62	9	302	280	110
DN25	16-40	25	115	85	68	50	4-M12	16	2	68	11	318	292	125
DN32	16-40	32	140	100	78	60	4-M16	18	2	79	11	339	305	130
DN40	16-40	38	150	110	88	65	4-M16	18	2	86	14	346	305	130
DN50	16-40	50	165	125	102	80	4-M16	20	2	87	14	357	350	139
DN65	16	62	185	145	122	110	4-M16	18	3	114	17	399	380	150
DN80	16	74	200	160	138	120	8-M16	20	3	133	17	418	430	170
DN100	16	100	220	180	158	152	8-M16	20	3	140	17	460	505	180
DN125	16	118	250	210	188	180	8-M16	22	3	171	22	521	570	200

DN	PN	C	D	K	d	L	n-Φd	T	f	H	A	H1	W	Q
DN65	25-40	62	185	145	122	110	8-M16	22	3	116	17	424	430	170
DN80	25-40	74	200	160	138	120	8-M16	24	3	133	17	433	505	180
DN100	25-40	100	235	190	162	152	8-M20	24	3	146	17	496	570	200
DN125	25-40	118	270	220	188	180	8-M20	26	3	171	22	551	625	236

气动螺纹球阀

Pneumatic Screw Thread Ball Valve

Q611F-16P/R

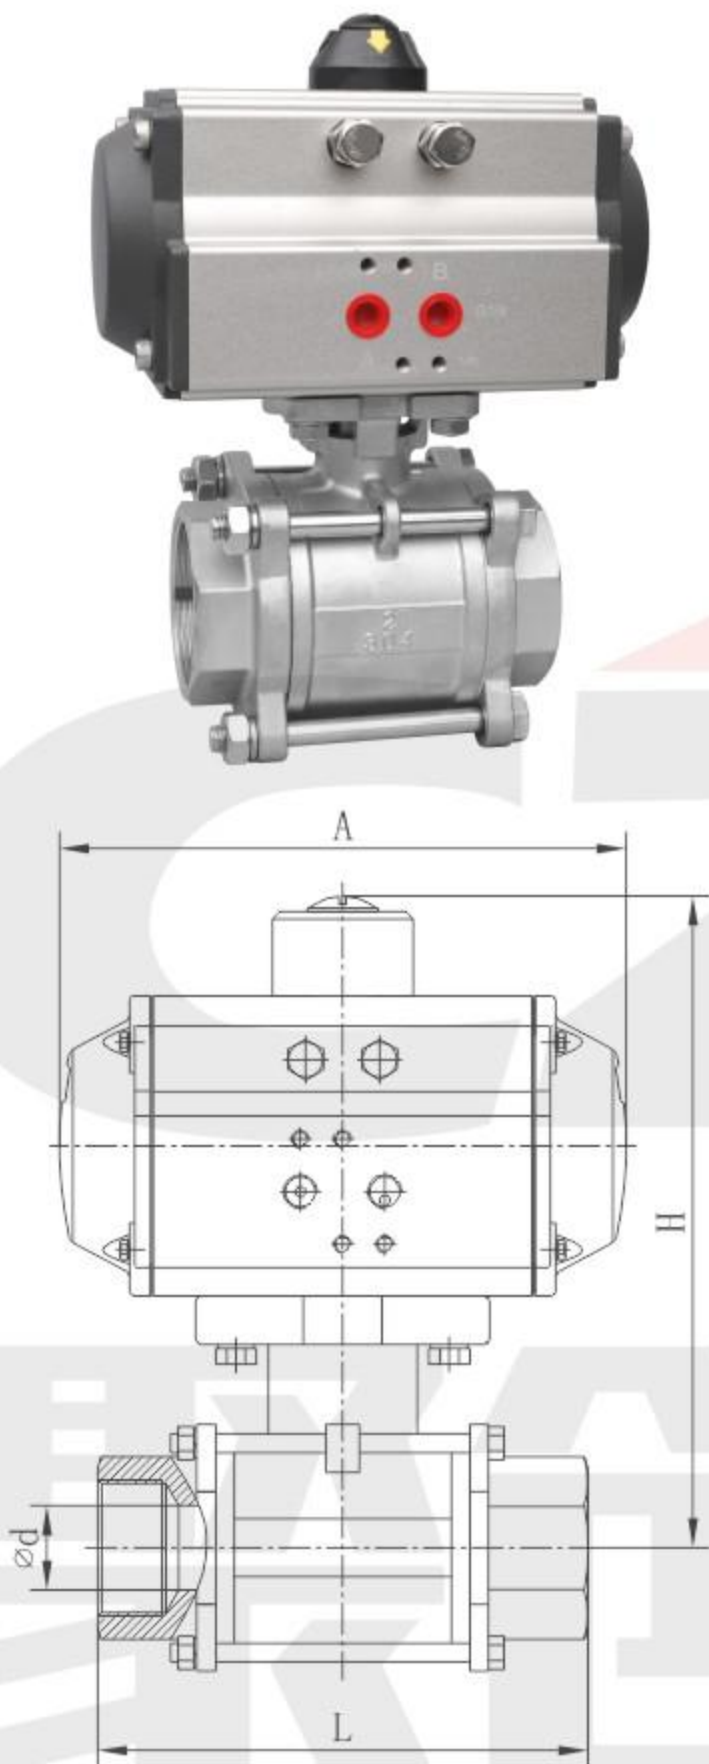

Q611F-16P/R

气动螺纹球阀

技术参数

介质温度: -20℃ ~ +180℃
环境温度: -20℃ ~ +60℃
公称压力: 0~4.0MPa
控制气体: 中性气体, 空气
气源压力: 0.3~0.8MPa
规格: DN15~DN100
阀体材质: CF8 CF8M
阀座材质: PTFE
阀杆材质: 304
密封圈材质: NBR

Technical parameters


Medium temperature: - 20 °C ~ + 180 °C
Ambient temperature: - 20 °C ~ + 60 °C
Nominal pressure: 0 ~ 4.0 MPa
Control gas, gas, air
Air pressure: 0.3 ~ 0.8 MPa
Specification: DN15~DN100
The valve body material: CF8 CF8M
seat material: PTFE
Stem material: 304
Sealing ring material: NBR

型 号 model	d	L	A	H	执行器 Actuator
1/2"	15	75	146	137	AT50
3/4"	20	80	146	141	AT50
1"	25	90	146	151	AT50
1-1/4"	32	110	163	172	AT63
1-1/2"	38	120	163	185	AT63
2"	50	140	214	209	AT75
2-1/2"	65	185	252	240	AT88
3"	78	205	270	264	AT100
4"	98	240	316	310	AT115

气动三通内螺纹球阀

Pneumatic Three-way Internal Thread Ball Valve

Q614(5)F(N、P)-PN16~64

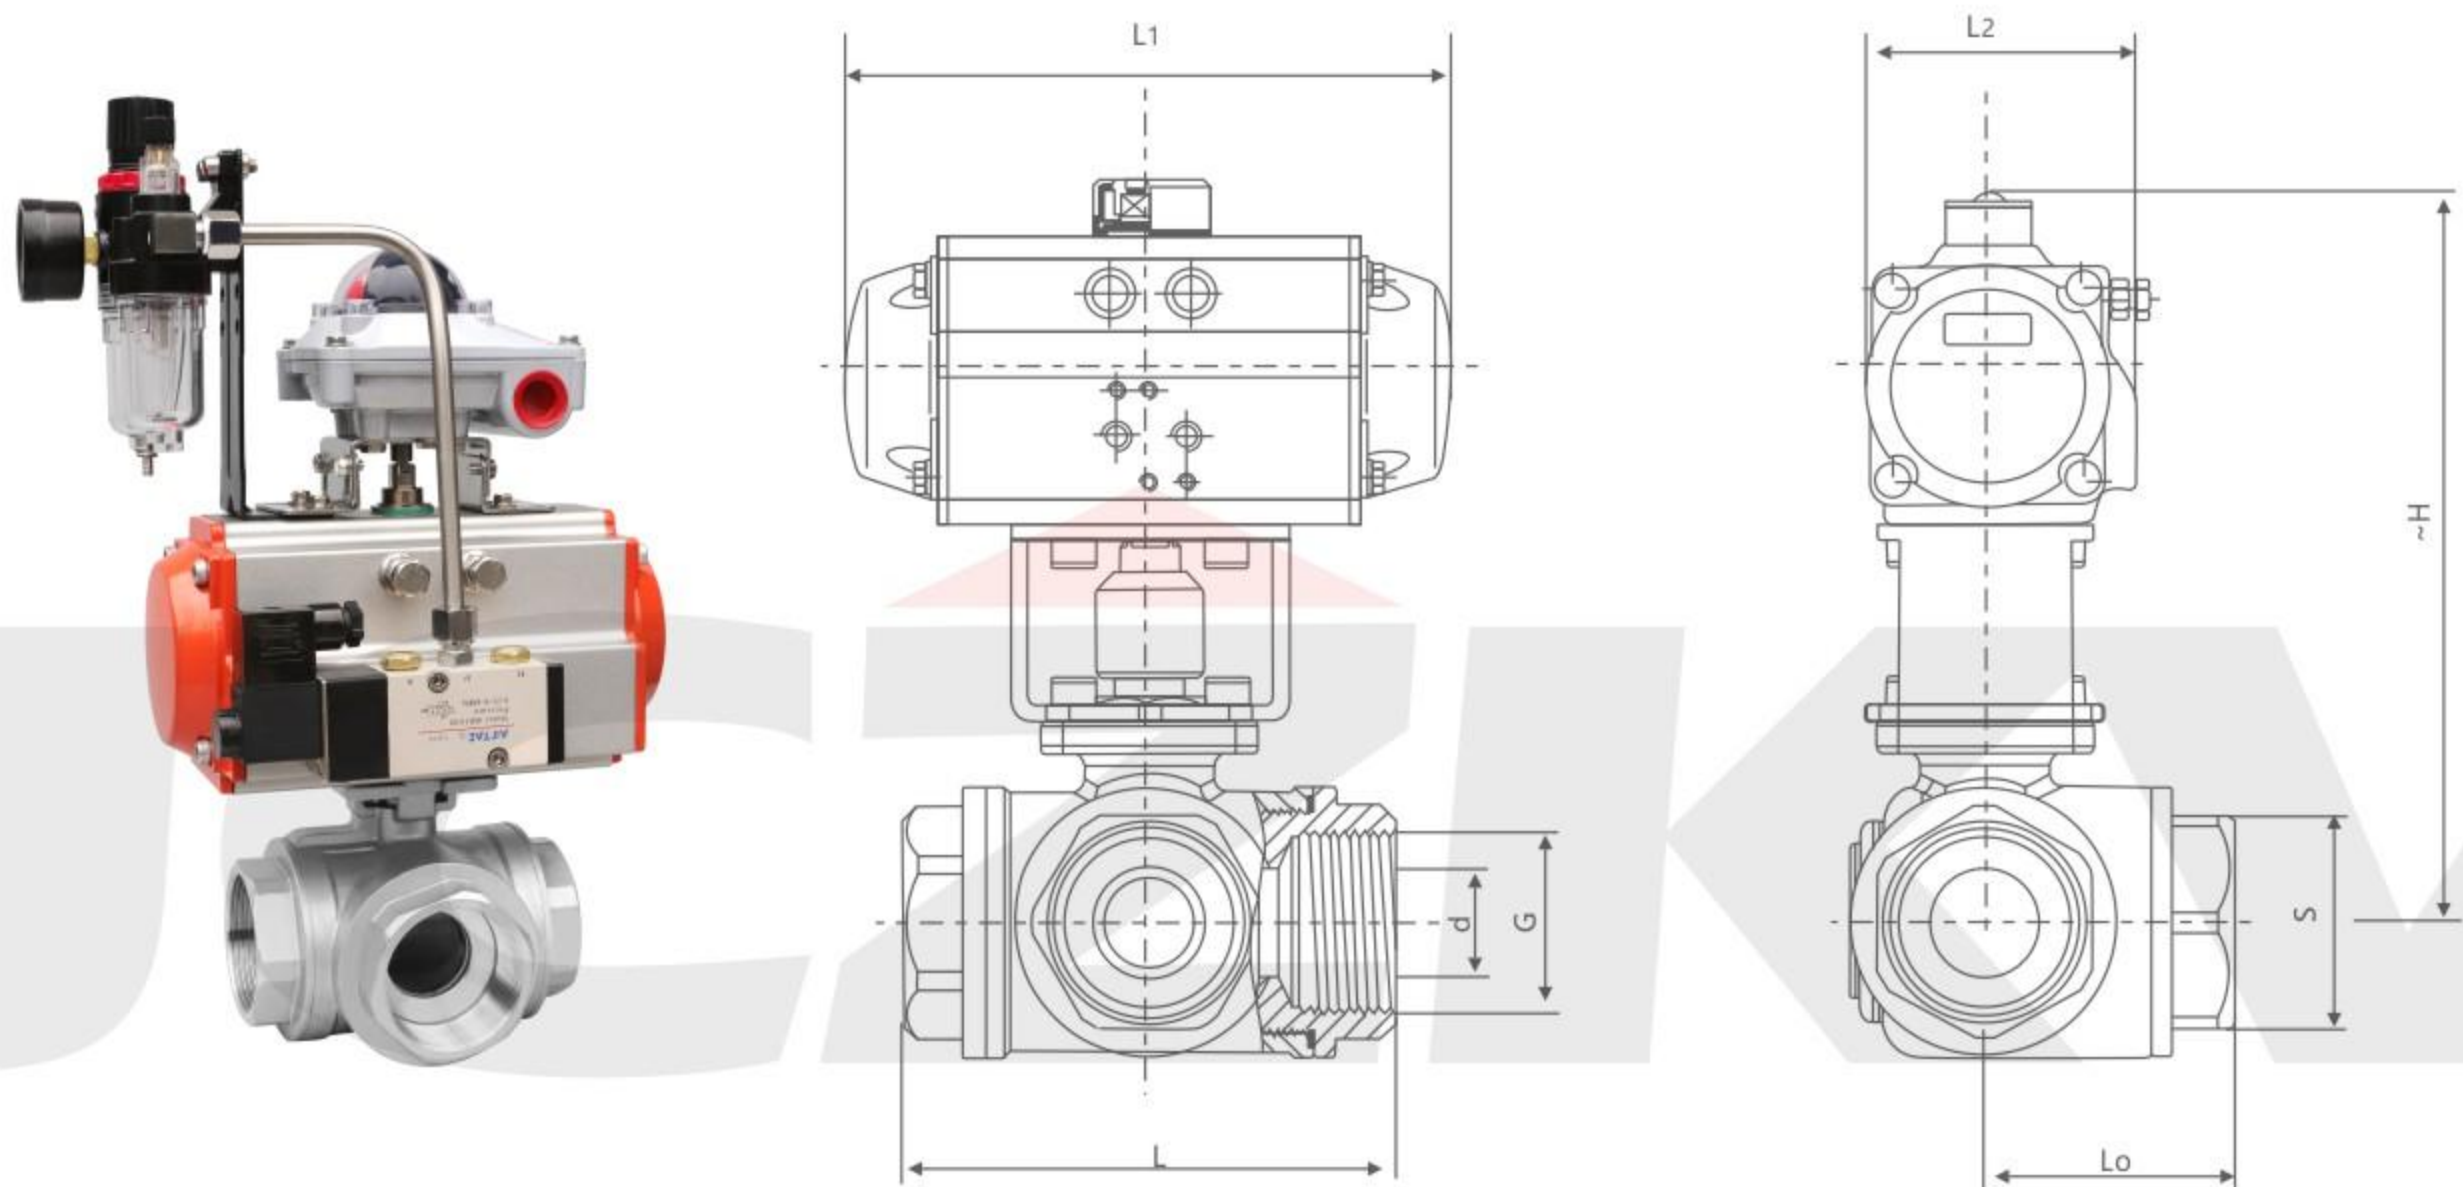


主要外形连接尺寸Q614(5)F(N、P)-PN16~64(1.6~6.4MPa) Overview Dimension

公称通径 Nominal diameter		外形连接尺寸 Dimension							
mm	In	D	G	L	LO	L1	L2	~H	S
15	1/2	10	1/2"	68	34	141/159	71/83	177/208	26
20	3/4	15	3/4"	78	39	141/159	71/83	180/211	32
25	1	20	1"	86	43	159/211	83/95	199/227	38
32	1 1/4	25	1 1/4"	111	55.5	211/248	95/107	231/251	49
40	1 1/2	32	1 1/2"	126	63	248/269	107/123	235/265	56
50	2	38	2"	143	71.5	248/269	107/123	263/298	70

注：系列球阀结构长度及连接法兰尺寸可根据JB/T79标准或用户要求设计制造。

气动三通法兰球阀
Pneumatic Three-way Flange Ball Valve

Q644(5)F(N、P、H、Y)-PN16、25

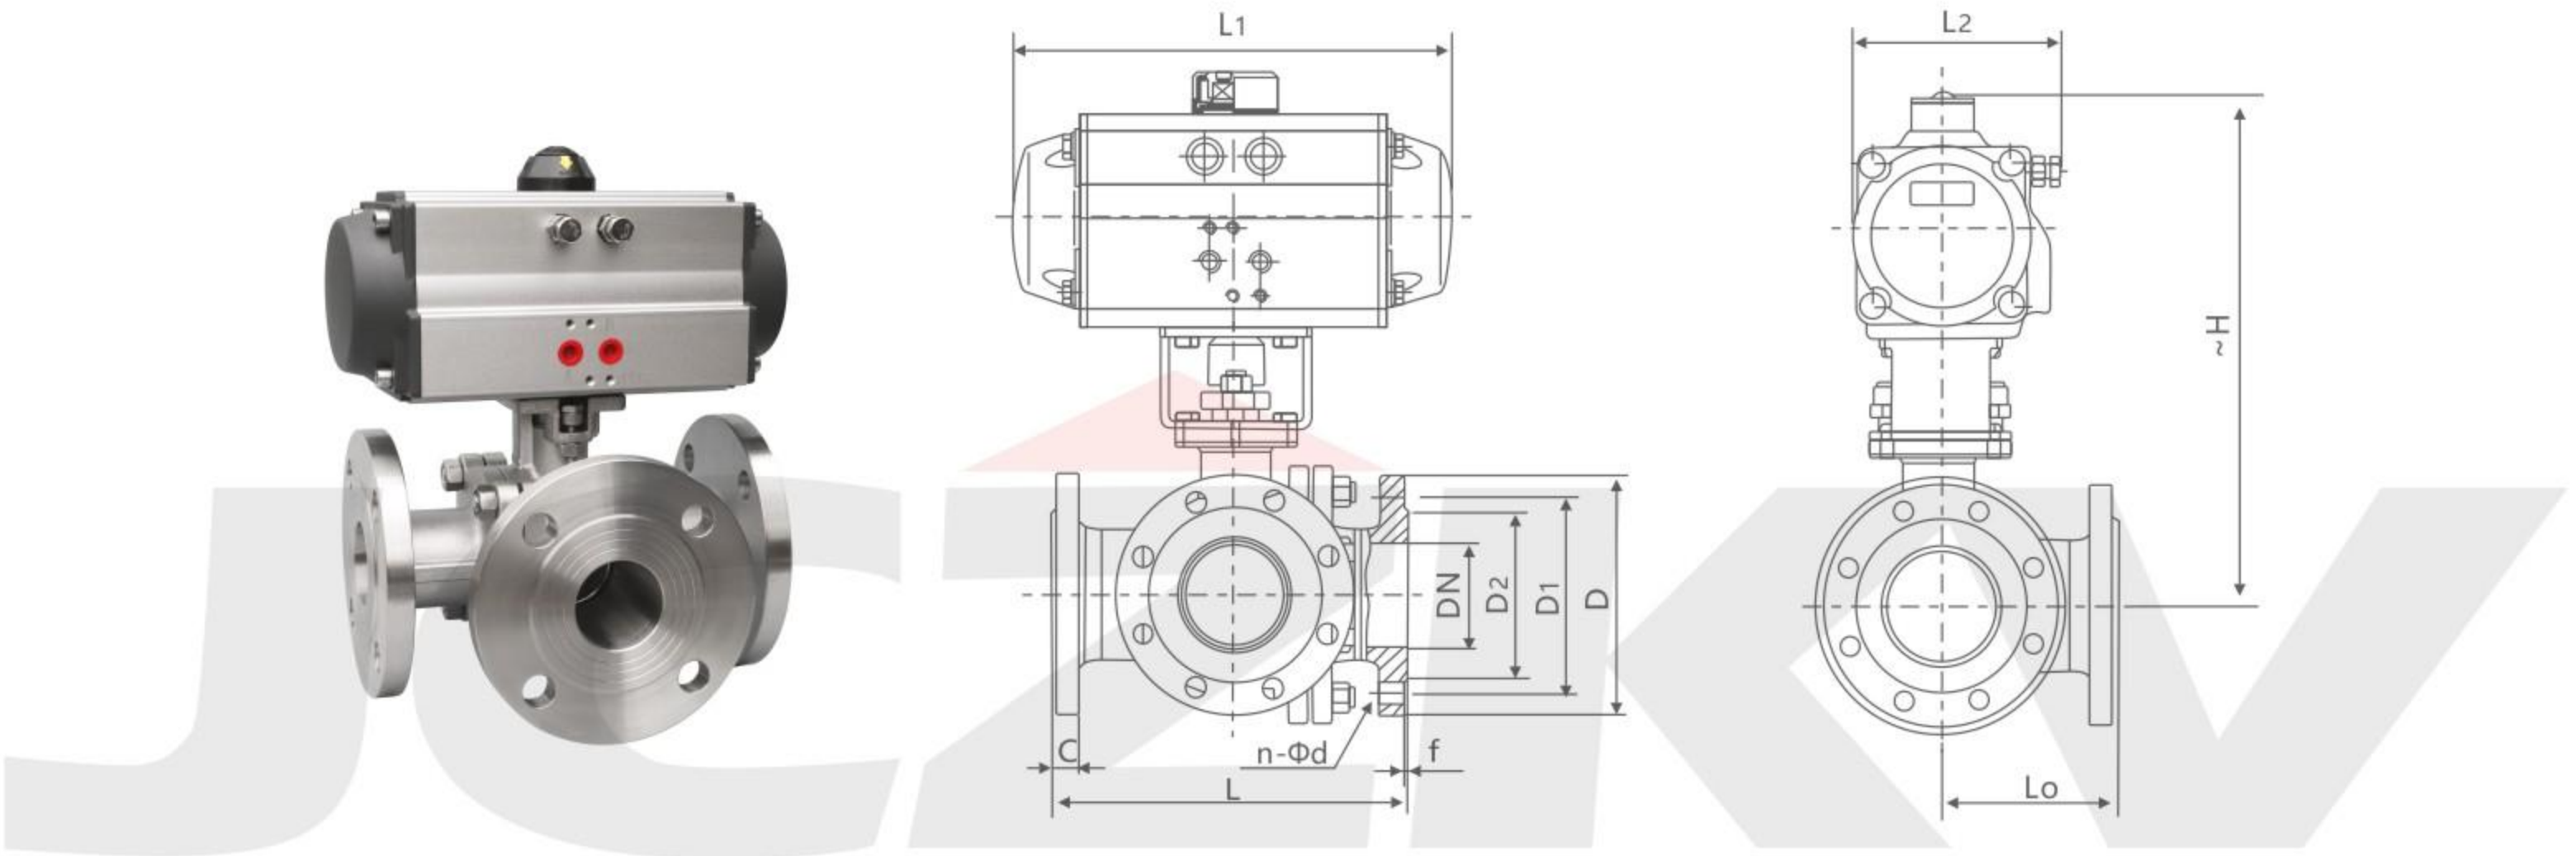

主要外形及连接法兰尺寸Q644F(P、H、Y)-PN16(1.6MPa) Overview Dimension

公称通径 Nominal diameter		外形尺寸 Dimension					连接尺寸Connecting Size					
mm	in	L	Lo	L1	L2	~H	D	D1	D2	C	f	n-Φd
15	1/2	150	72	141/159	71/83	240/235	95	65	46	14	2	4-Φ14
20	3/4	160	80	159/211	83/95	240/252	105	75	56	16	2	4-Φ14
25	1	180	90	211/248	95/107	257/265	115	85	65	16	2	4-Φ14
32	1 1/4	200	100	211/248	95/107	277/312	140	100	76	18	3	4-Φ18
40	1 1/2	220	110	248/269	107/123	292/317	150	110	84	18	3	4-Φ18
50	2	240	120	248/345	107/152	325/347	165	125	99	20	3	4-Φ18
65	2 1/2	260	130	315/409	141/172	357/389	185	145	118	20	3	4-Φ18
80	3	280	140	345/409	152/172	368/400	200	160	132	20	3	8-Φ18
100	4	320	160	409/550	172/215	410/498	220	180	156	22	3	8-Φ18
125	5	380	190	438/600	187/240	470/538	250	210	184	22	3	8-Φ18
150	6	440	220	550/633	215/262	556/591	285	240	211	24	3	8-Φ22
200	8	550	260	600/730	210/330	648/687	340	295	266	24	3	12-Φ22

气动卫生级快装球阀

Quick Install Ball Valve Pneumatic Health Level

Q681F-10P/R




技术参数

介质温度: $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$
 环境温度: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
 公称压力: $0 \sim 1.0\text{MPa}$
 控制气体: 中性气体, 空气
 气源压力: $0.3 \sim 0.8\text{MPa}$
 规格: $\Phi 19 - \Phi 159$
 阀体材质: CF8 CF8M
 阀座材质: PTFE
 阀杆材质: 304
 密封圈材质: NBR

Technical parameters

Medium temperature: $-20^{\circ}\text{C} \sim +180^{\circ}\text{C}$
 Ambient temperature: $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
 Nominal pressure: $0 \sim 1.0\text{MPa}$
 Control gas, gas, air
 Air pressure: $0.3 \sim 0.8\text{MPa}$
 Specification: $\Phi 19 - \Phi 159$
 The valve body material: CF8 CF8M
 seat material: PTFE
 Stem material: 304
 Sealing ring material: NBR

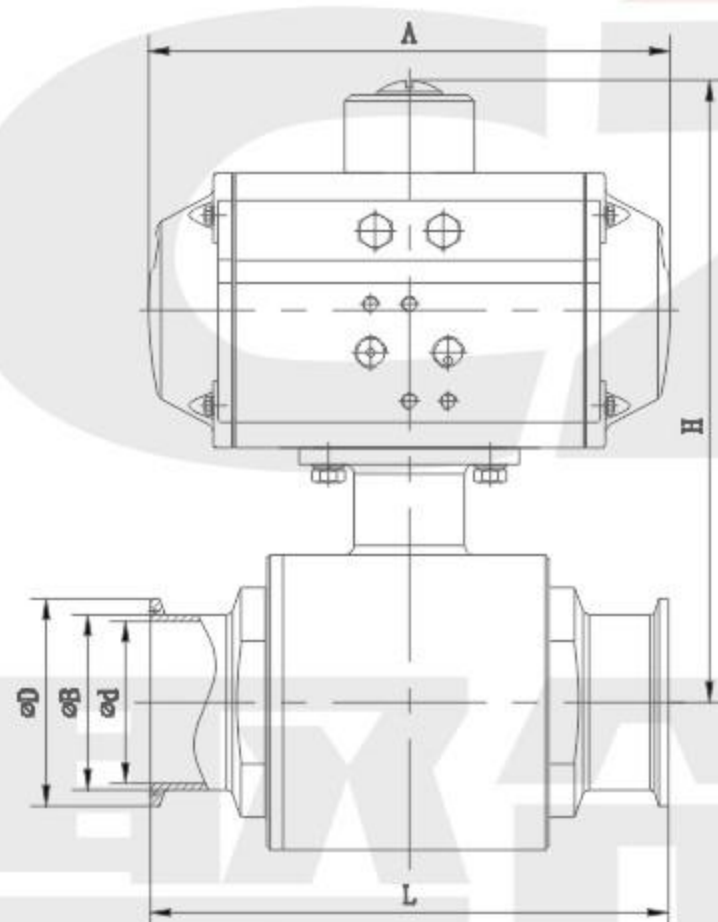


Q681F-10P/R
气动卫生级快装球阀

型号 model	L	d	D	A	H	执行器 Actuator
$\Phi 19$	108	16	50.5	146	144	AT50
$\Phi 25$	112	22	50.5	146	149	AT50
$\Phi 32$	125	29	50.5	146	156	AT50
$\Phi 38$	135	35	50.5	163	180	AT63
$\Phi 45$	150	42	64	163	192	AT63
$\Phi 51$	160	48	64	214	205	AT75
$\Phi 57$	170	53	77.5	214	212	AT75
$\Phi 63$	178	59	77.5	252	225	AT88
$\Phi 76$	220	72	91	252	230	AT88
$\Phi 89$	240	85	106	270	265	AT100
$\Phi 102$	270	97	119	316	295	AT115
$\Phi 114$	320	108	130	316	300	AT115
$\Phi 133$	400	125	145	354	312	AT125
$\Phi 159$	480	150	172	350	350	AT145

气动V型对夹球阀

Pneumatic V Type Ball Valve To The Clamp

Q641F-16P/R

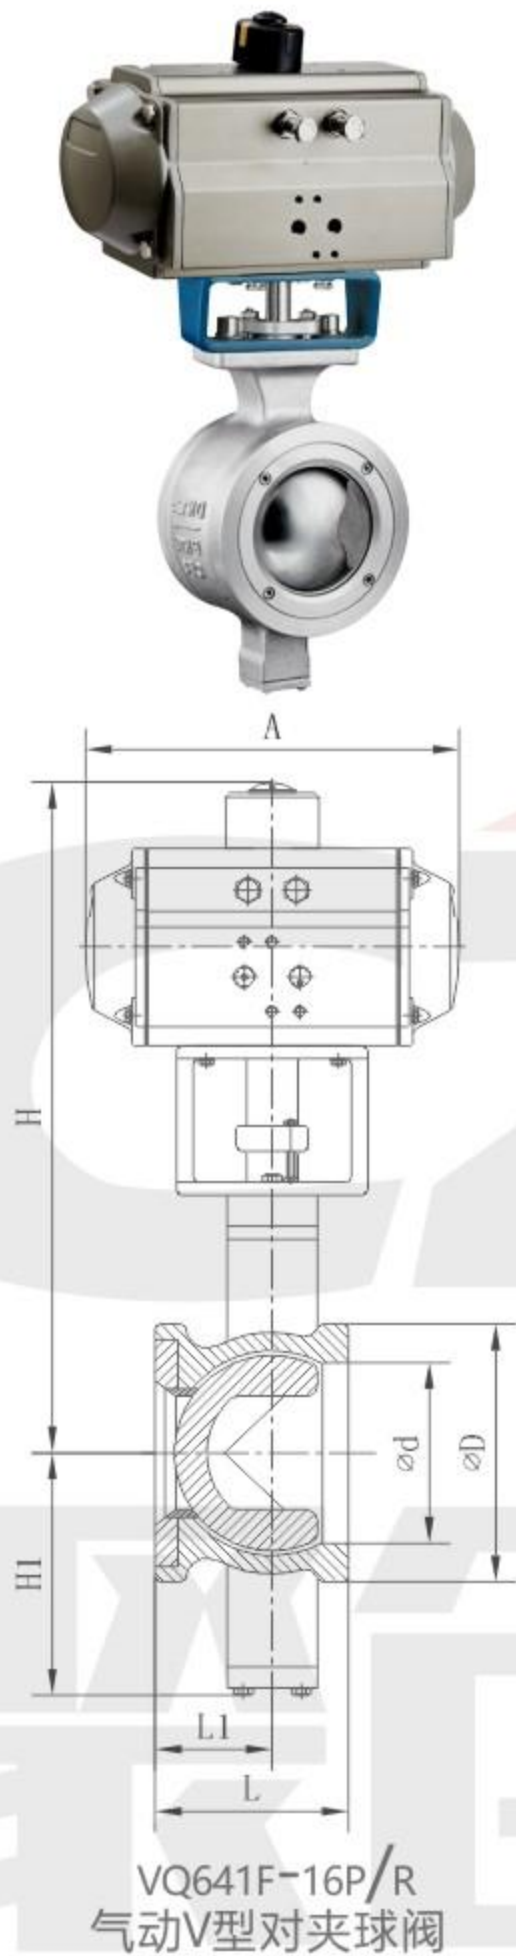

技术参数
介质温度: -20℃ ~ +180℃
环境温度: -20℃ ~ +60℃
公称压力: 0~1.6MPa
控制气体: 中性气体, 空气
气源压力: 0.3~0.8MPa
规格: DN25-DN250
阀体材质: CF8 CF8M
阀座材质: PTFE 硬质合金
阀杆材质: 304
密封圈材质: NBR

Technical parameters
Medium temperature: - 20 °C ~ + 180 °C
Ambient temperature: - 20 °C ~ + 60 °C
Nominal pressure: 0 ~ 1.6 MPa
Control gas, gas, air
Air pressure: 0.3 ~ 0.8 MPa
Specification: DN25 - DN250
The valve body material: CF8 CF8M
seat material: carbide PTFE
Stem material: 304
Sealing ring material: NBR

型号 model	d	D	L	L1	A	H	H1	执行器 Actuator
DN25	38	68	50	30	163	248	81	AT63
DN32	45	76	60	35	214	270	88	AT75
DN40	50	84	60	35	214	275	90	AT75
DN50	62	100	75	43	252	295	93	AT88
DN65	73	118	100	50	270	322	108	AT100
DN80	90	132	100	57	316	362	123	AT115
DN100	115	158	115	65	354	387	138	AT125
DN125	134	184	129	78	418	423	148	AT145
DN150	164	216	160	95	450	475	170	AT160
DN200	206	268	200	120	518	535	200	AT190
DN250	260	326	240	148	530	615	240	AT210